



SHAFT & SPINDLE GEARBOXES

MODEL 100 & 130

**OVER 50 YEARS
OF EXPERIENCE**

- ⚙️ Load-N-Lock™ Shaft Retention
- ⚙️ Manufactured with 132L Heavy-Duty Shaft Assembly
- ⚙️ Gearbox Mounting – Flanged or Custom


**Shorter
Lead Time**

**USA
Made**

**Premium
Quality**



SCAN HERE

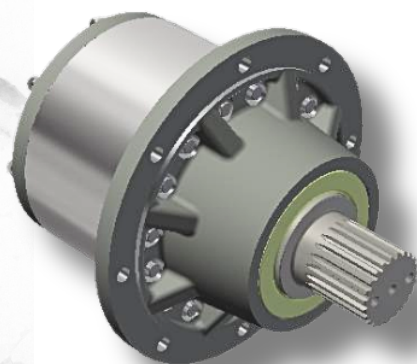

Model 100

- Maximum Intermittent Output Torque
100,000 In. Lbs. / 12,299 Nm.
- Continuous Output Torque
50,000 In. Lbs. / 5,649 Nm.
- Maximum Input Speed:
3,000 RPM
- Standard Ratios
4, 6, 19, 26, 33, 36, 45
- Output
Shaft & Spindle

Model 131

- Maximum Intermittent Output Torque
130,000 In. Lbs. / 14,688 Nm.
- Continuous Output Torque
65,000 In. Lbs. / 7,344 Nm.
- Maximum Input Speed:
3,000 RPM
- Standard Ratios
4, 6, 19, 26, 33, 36, 45
- Output
Shaft & Spindle



LIVE BED TRAILER



STUMPER GRINDER



MARINE HARVESTER




BUILT TO LAST




SHAFT OUTPUT

131 1&2-Stage General Dimensions Flanged 'A2' Option

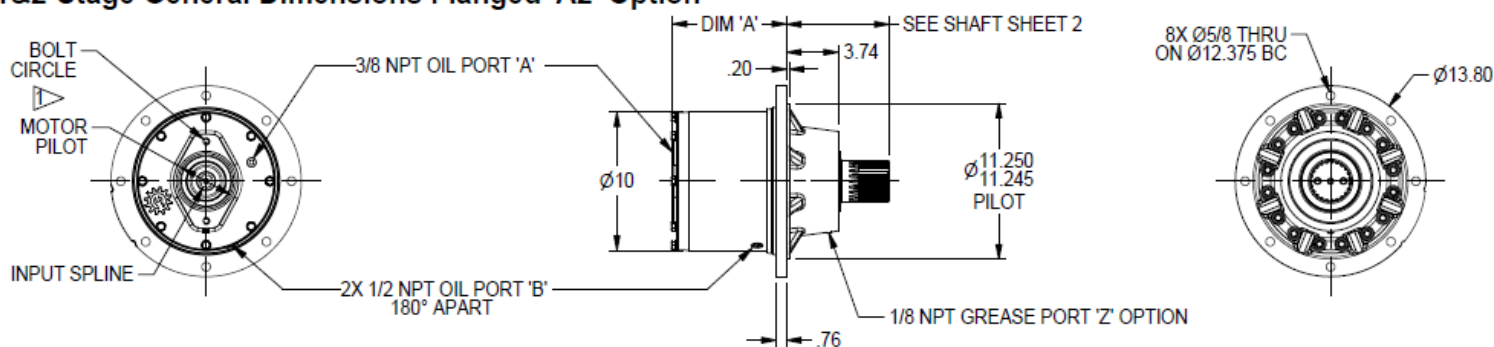

SPINDLE OUTPUT

131 1&2-Stage General Dimensions Flanged 'A2' Option

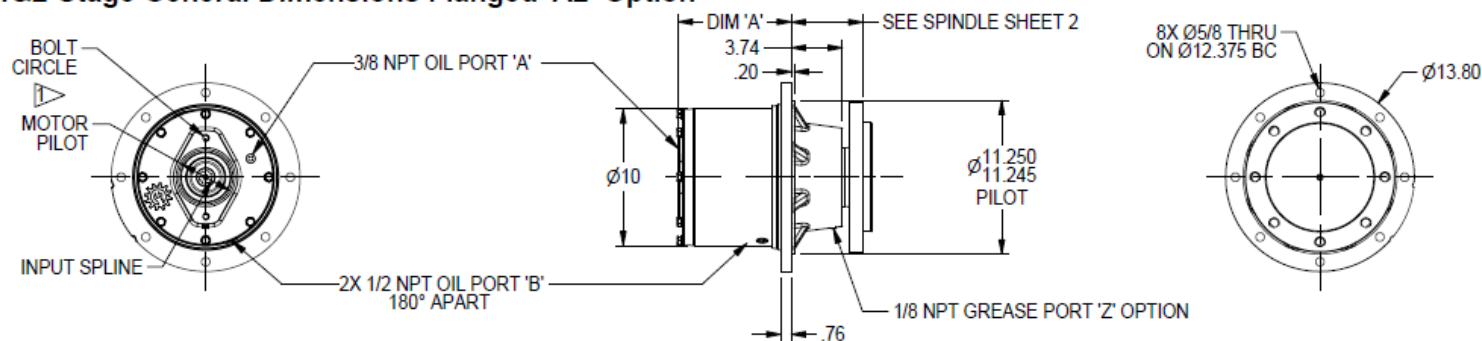

MODEL 100 SHAFT OPTIONS

- D7 - Ø2.00 X 1/2" KEY
- D8 - Ø3.00 X 5/8" KEY
- D9 - 23T 12/24DP SPLINE X 1.87" LONG
- D10 - 20T 8/16DP SPLINE X 2.12" LONG
- D11 - 23T 8/16DP SPLINE X 2.25" LONG
- S1 - 8X Ø3/4-16 UNF ON Ø9.500 B.C.
- S2 - 8X Ø.666-.654 ON Ø8.500 B.C.
- S3 - 8X Ø5/8-11 UNC ON Ø9.500 B.C.
- S4 - 8X Ø5/8-11 UNC ON Ø7.250 B.C.

MODEL 131 SHAFT OPTIONS

- D8 - Ø3.00 X 5/8" KEY
- D10 - 20T 8/16DP SPLINE X 2.12" LONG
- D11 - 23T 8/16DP SPLINE X 2.25" LONG
- H2 - 2 1/2" HEX
- S3 - 8X Ø5/8-11 UNC ON Ø9.500 B.C.
- S5 - 8X Ø5/8-11 UNC ON Ø6.000 B.C.
- S6 - 8X Ø11/16 ON Ø9.000 B.C.