



OMEGA Series

STRENGTH. DEPENDABILITY. DURABILITY



Engineered for the Loading Cycle,
Not Just the Line Pull.



**Warranty &
Registration**

Products shipped on or after March 1, 2026 come standard with an 18-month limited warranty, plus an additional 18 months of coverage when you register your product.

Register Your Winch Today:
ramseyindustries.com/warranty/



The Engineered Intelligence Behind
Every Lift, Pull, and Rotation



OMEGA 8000

Heavy Duty Planetary



8,000 lb
Rated Line Pull

★ Features and Benefits

- Simple design
- Field serviceable
- Strong automatic load-holding brake for strength and reliability
- Multiple drum sizes available
- Built to perform under extreme conditions
- Optimal power to weight ratio
- Low profile envelope for compact installation. Saves weight and space
- Easy to use and verify engagement. Spring loaded pull and rotate clutch design for free spooling
- Available in both air and manual shift
- Superior cable management system; Ramsey roller tensioner
- Parts optimized to provide strength
- Meets SAE J706
- 3 year warranty with product registration (Products Shipped on/after March 1st, 2026)
- Built in Tulsa, Oklahoma

OMEGA 8000 SPECIFICATIONS

Rated Line Pull	8,000 lbs (3,629 kgs)
Weight (without Cable)	126 lbs (57.15 kgs)
Gear Reduction	5.1:1

Layer of Cable		1	2	3	4
*Rated Line Pull / Layer	lbs. kgs.	8,000 3,629	6,815 3,091	5,936 2,693	5,258 2,385
*Cable Capacity	Ft. M.	26 8.1	57 17.5	93 25.4	133 40.6
Line Speed at 17 GPM	FPM MPM	52 15.7	60 18.2	68 20.6	76 23.1


* Specifications are based on recommended wire rope of 3/8" (10 mm) EIPS cable and a 15.2 cu in./rev. motor.

* 2,000 psi (137.9 bar) working pressure



- Winch meets SAE J706.

NOTE: The rated line pulls shown are for the winch only. Consult the wire rope manufacturer for wire rope ratings.

OMEGA / 8000 //

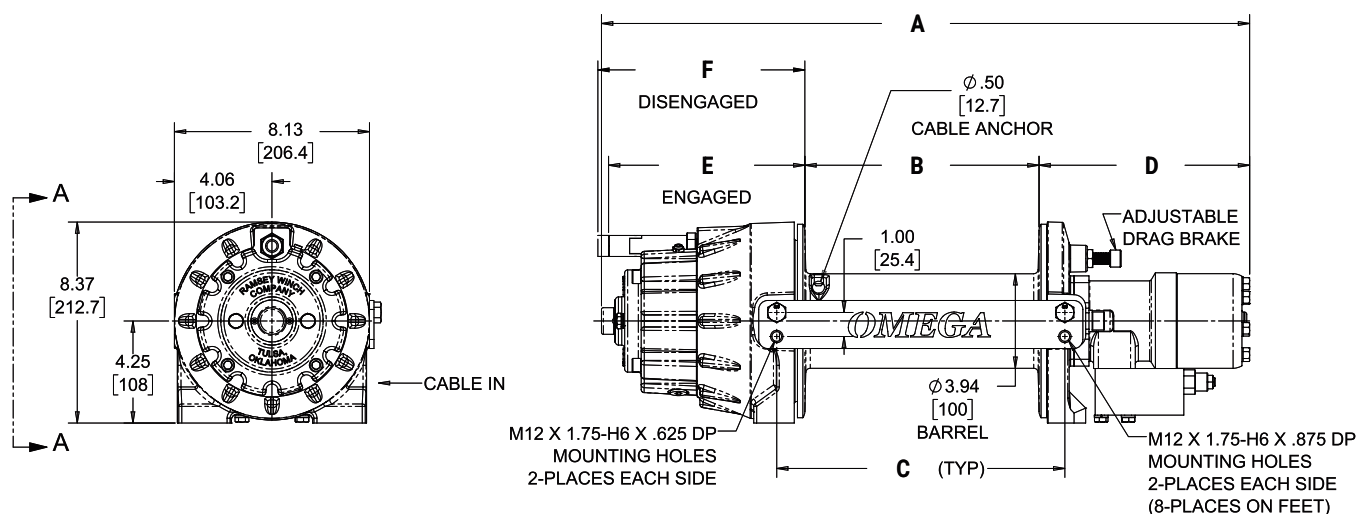

WINCH MODEL	A Inches (mm)	B Inches (mm)	C Inches (mm)	D Inches (mm)	E Inches (mm)	F Inches (mm)
Standard Drum (Air and Manual Shift)	26.99 (685.6)	9.75 (247.7)	12.00 (304.8)	8.77 (222.8)	8.18 (207.7)	8.62 (219.1)

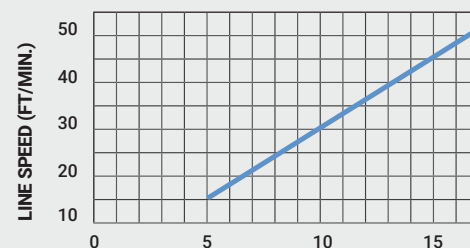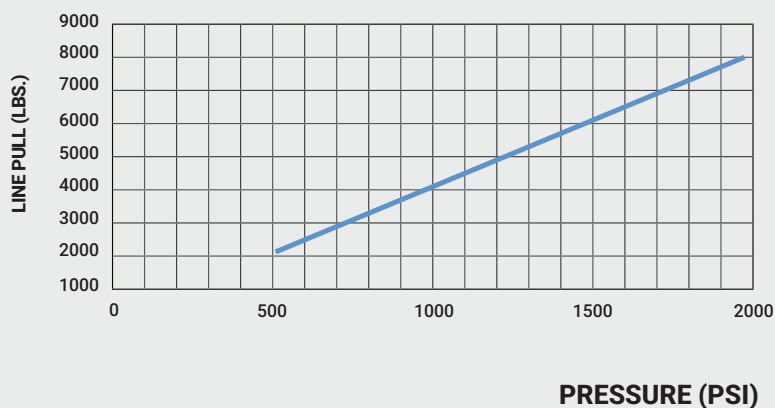

OMEGA 10000

Heavy Duty Planetary



★ Features and Benefits

- Simple design
- Field serviceable
- Strong automatic load-holding brake for strength and reliability
- Multiple drum sizes available
- Built to perform under extreme conditions
- Optimal power to weight ratio
- Low profile envelope for compact installation. Saves weight and space
- Easy to use and verify engagement. Spring loaded pull and rotate clutch design for free spooling
- Available in both air and manual shift
- Superior cable management system; Ramsey roller tensioner
- Parts optimized to provide strength
- Meets SAE J706
- 3 year warranty with product registration (Products Shipped on/after March 1st, 2026)
- Built in Tulsa, Oklahoma

OMEGA 10000 SPECIFICATIONS

Rated Line Pull	10,000 lbs (4,536 kgs)
Weight (without Cable)	126 lbs (57.15 kgs)
Gear Reduction	5.1:1

Layer of Cable		1	2	3	4
*Rated Line Pull / Layer	lbs. kgs.	10,000 4,536	8,334 3,240	7,144 2,836	6,251 2,521
*Cable Capacity	Ft. M.	23 7.0	51 15.4	83 25.2	120 36.4
Line Speed at 17 GPM	FPM MPM	35 10.6	41 12.5	47 14.4	54 16.3


* Specifications are based on recommended wire rope of 7/16" (11 mm) EIPS cable and a 22.8 cu in./rev. motor.

* 1,700 psi working pressure



- Winch meets SAE J706.

NOTE: The rated line pulls shown are for the winch only. Consult the wire rope manufacturer for wire rope ratings.

OMEGA // 10000 //

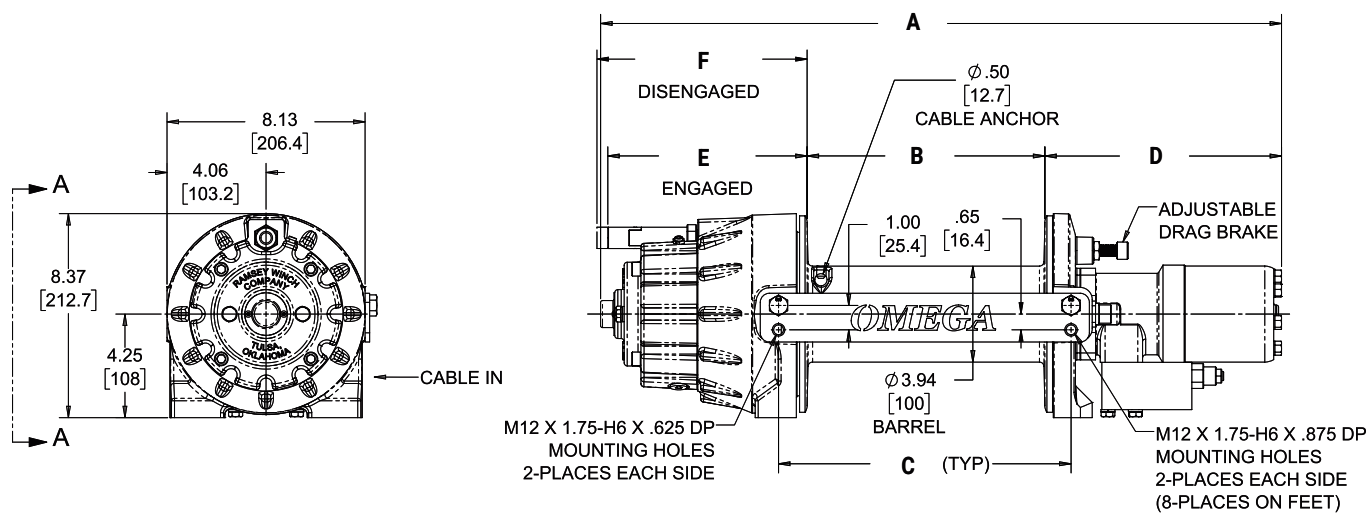


WINCH MODEL	A Inches (mm)	B Inches (mm)	C Inches (mm)	D Inches (mm)	E Inches (mm)	F Inches (mm)
Standard Drum (Air and Manual Shift)	27.93 (709.5)	9.75 (247.7)	12.00 (304.8)	9.71 (246.6)	8.18 (207.7)	8.62 (219.1)

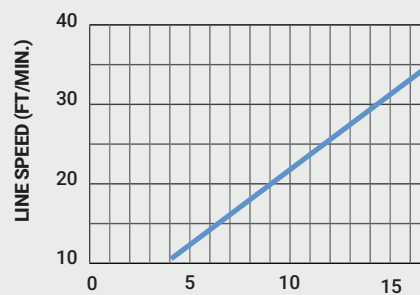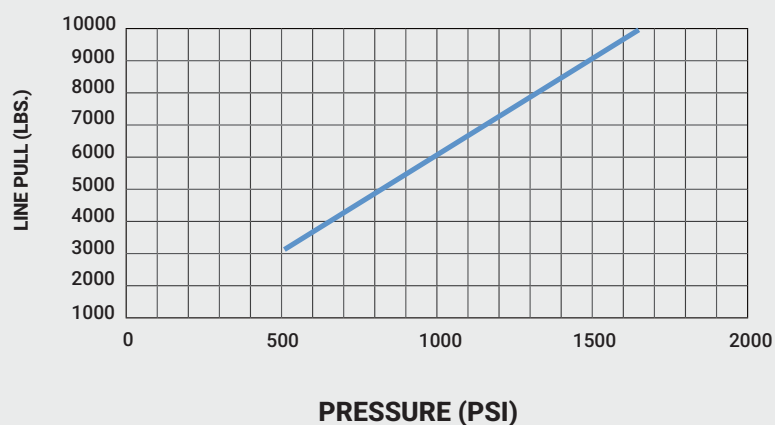

OMEGA 12000

Heavy Duty Planetary

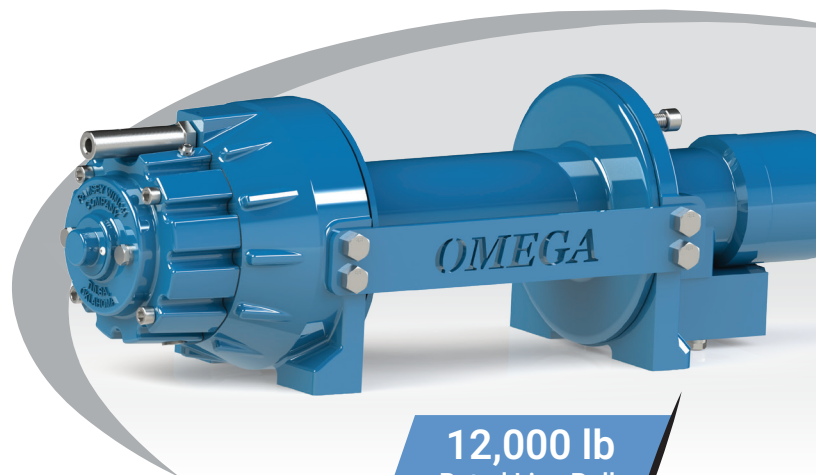

★ Features and Benefits

- Simple design
- Field serviceable
- Strong automatic load-holding brake for strength and reliability
- Multiple drum sizes available
- Built to perform under extreme conditions
- Optimal power to weight ratio
- Low profile envelope for compact installation. Saves weight and space
- Easy to use and verify engagement. Spring loaded pull and rotate clutch design for free spooling
- Available in both air and manual shift
- Superior cable management system; Ramsey roller tensioner
- Parts optimized to provide strength
- Meets SAE J706
- 3 year warranty with product registration (Products Shipped on/after March 1st, 2026)
- Built in Tulsa, Oklahoma

OMEGA 12000 SPECIFICATIONS

Rated Line Pull	12,000 lbs (5,443 kgs)
Weight (without Cable)	126 lbs (57.15 kgs)
Gear Reduction	5.1:1

Layer of Cable		1	2	3	4
*Rated Line Pull / Layer	lbs. kgs.	12,000 5,443	10,001 4,536	8,573 3,889	7,502 3,403
*Cable Capacity	Ft. M.	23 7.0	51 15.4	83 25.2	120 36.4
Line Speed at 17 GPM	FPM MPM	35 10.6	41 12.5	47 14.4	54 16.3


* Specifications are based on recommended wire rope of 7/16" (11 mm) EIPS cable and a 22.8 cu in. (373.6 cc)/rev. motor.

* 2,000 psi (137.9 bar) working pressure



- Winch meets SAE J706.

NOTE: The rated line pulls shown are for the winch only. Consult the wire rope manufacturer for wire rope ratings.

OMEGA // 12000 //

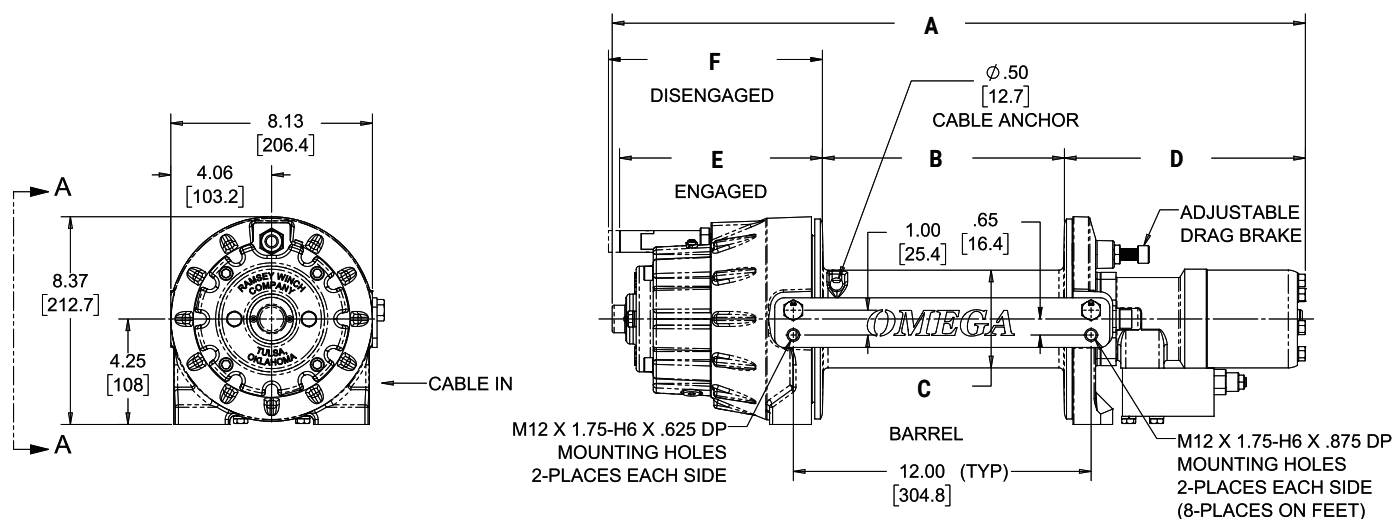

WINCH MODEL	A Inches (mm)	B Inches (mm)	C Inches (mm)	D Inches (mm)	E Inches (mm)	F Inches (mm)
Standard Drum (Air and Manual Shift)	27.93 (709.5)	9.75 (247.7)	12.00 (304.8)	9.71 (246.6)	8.18 (207.7)	8.62 (219.1)

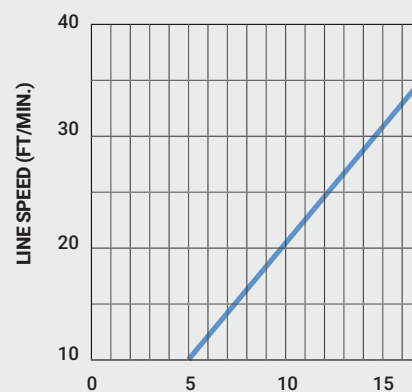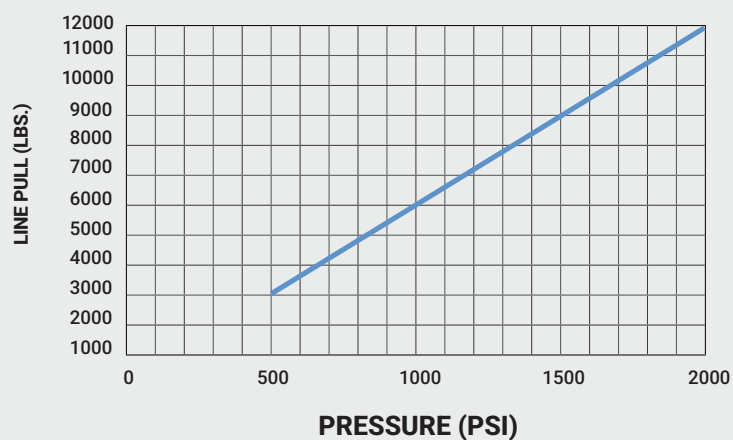



WHO WE ARE

Ramsey Winch has set the standard for industrial and recovery winches trusted by fleets, defense, towing, and utility professionals worldwide.

Engineered in the USA and Built in Tulsa, OK.

CONTACT US

📍 4707 N Mingo Rd, Tulsa, OK 74117
✉️ rwcustomersupport@ramseyindustries.com
☎️ 1-800-777-2760



The Engineered Intelligence Behind
Every Lift, Pull, and Rotation